
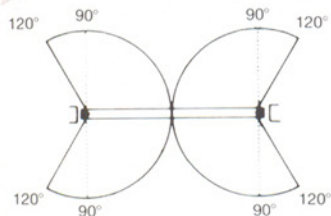



FLOOR HINGES

200 series

Center-Hung Floor Hinges for Inward and Outward Opening
Offset-Hung Floor Hinges for One-side Opening

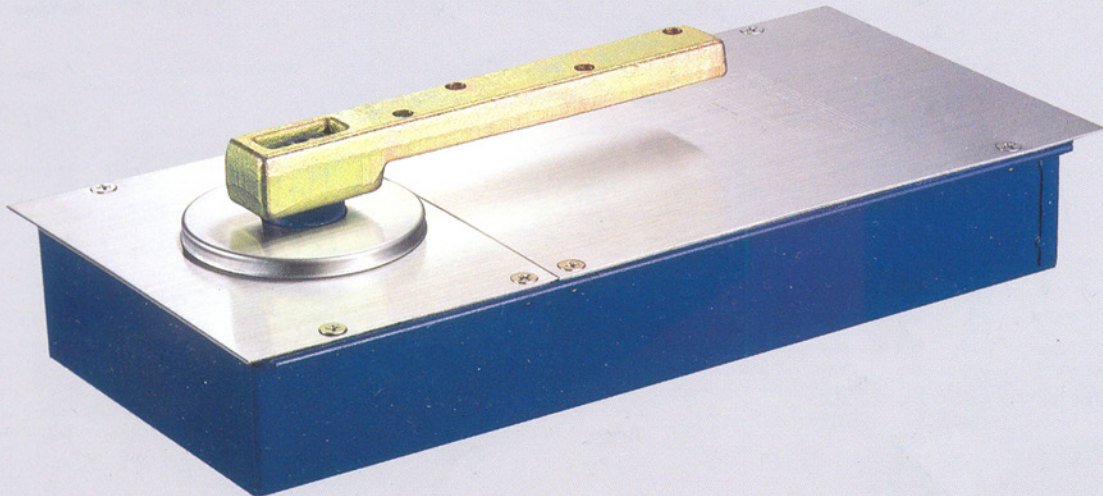

Center-Hung Inward and Outward Opening
(90° Hold-Open)




Offset-Hung 115° One-Side Opening Right or Left Hand
(85° Hold-Open)

- The thickness of these offset floor hinges has been further reduced for installation on the thinnest of thin slab.
- Alignment of the door is adjustable after hanging by making a simple adjustment to the main body alone. (H type)
- A 2-valve function allows easy closing speed adjustment.
- The inner structure of this hinge has been specially designed to ensure durable operation.


Type	Article Number		Applicable Door Dimensions DW×DHmm	Maximum Door Weight kg
	Without Hold-Open	With Hold-Open		
Center Hung	211	S-211	900×2100	70
	222	S-222	950×2100	105
	233	S-233	1050×2400	150
	H-211	HS-211	900×2100	70
	H-222	HS-222	950×2100	105
	H-233	HS-233	1050×2400	150
	H-211Z	HS-211Z	900×2100	70
	H-222Z	HS-222Z	950×2100	105
	H-233Z	HS-233Z	1050×2400	150
Offset Hung	O-211	OS-211	900×2100	70
	O-222	OS-222	950×2100	105
	OH-211	OHS-211	900×2100	70
	OH-222	OHS-222	950×2100	105

- Z Model is also available, with which alignment can be adjusted by means of the top pivot.

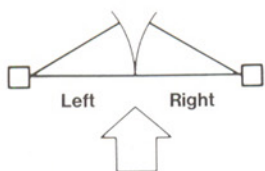

Determination of Door Hand.


Adjustment Procedure

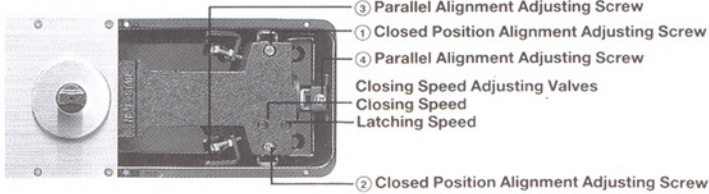

1. Closed Position Alignment


Loosen the parallel alignment adjusting screws ③ and ④. Then, proceed to adjust with closed position alignment adjusting screws ① and ②.

Parallel Alignment

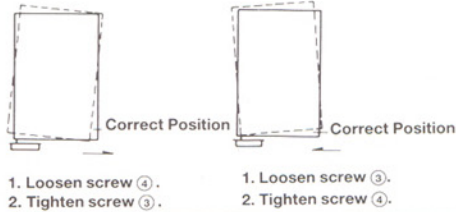


2. Closing Speed Adjustment

To adjust the closing speed, turn the closing speed valves in the direction of the arrows.




3. Note

When a type Z Pivot is used, parallel alignment can be adjusted by means of the top pivot.



H-211 HS-211 H-222 HS-222 H-233 HS-233

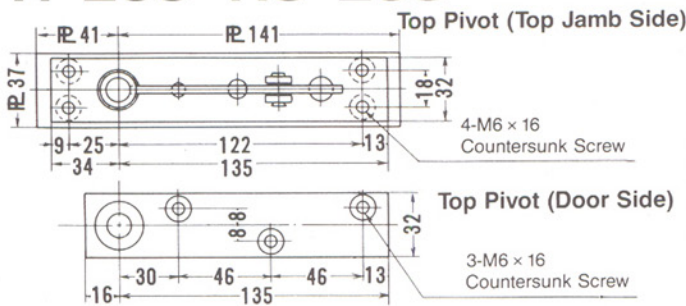

(With a Top Pivot Movable and Adjustable at the Door Side)

