

No.600 series

New...
Super-thin...
Ideal for regular or
aluminum sash doors

Concealed Door Closer

▼ No.600UA type

638UA, 1638UA, 638UA-BC, 1638UA-BC

▼ No.600U type




Aluminium Body

28^m/_m




Cast Iron Body

Standard

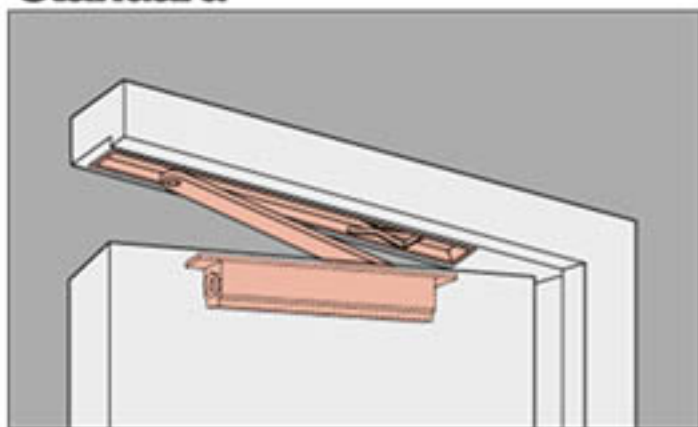

Reverse

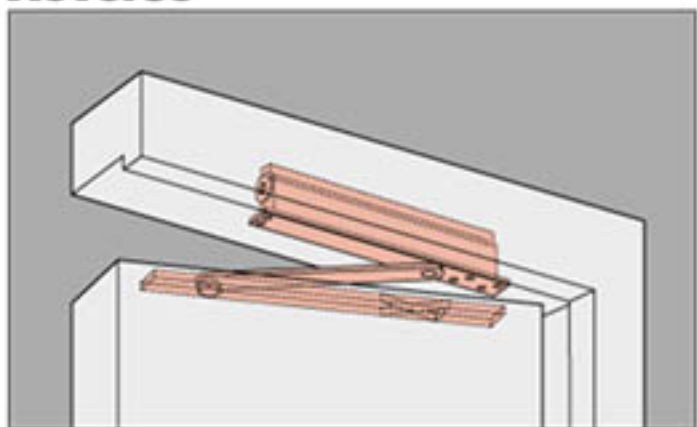

Close the door, and the door closer remains out of sight. Open it, and the closer's sleek lines lend beauty to your room decor. With light and smooth action, outstanding performance and superb durability, the 600U Series NHN Concealed Door Closer offers quietness and style in guest rooms, studies and other rooms.

Features

1. With the door closed, the main body and lever are concealed to streamline the external appearance available for standard and reverse-installation closers.
2. The super-thin main body can be installed even on thin doors aluminum doors, standard steel doors, wooden doors, etc.
3. The refined design, providing smooth opening and closing, is ideal for reception rooms, hotel rooms, libraries, etc closing speed and the hold-open angle can be easily adjusted.
4. Functional, durable, and attractive a needle bearing smoothly operates the stylish closer.

Models and applicable standard doors

Model	Applicable doors (indoors only)	
	Dimensions (mm)	Weight (kg)
No.618U (without hold-open device)	800×1800	15-30
No.1618U (with hold-open device)		
No.628U (without hold-open device)	900×2100	25-45
No.1628U (with hold-open device)		
No.638U (without hold-open device)	900×2100	40-65
No.1638U (with hold-open device)		
No.638UA (without hold-open device)	900×2100	40-65
No.1638UA (with hold-open device)		
No.638UA-BC (with back check and without hold-open device)		
No.1638UA-BC (with back check and with hold-open device)		

*Use No.60-Series when the door is exposed to strong wind.

Option

No.618U-15, 628U-15 and No.638U-15 are available when a super-thin (15-mm) guide rail is required (models without hold-open device only).

Installation and Precautions

- This closer can be installed with butt hinge or pivot-hinge doors. Standard or reverse installation is possible in either door.
- For standard installation, the width of wooden door must be at least 40mm, and that of a sash door, 36mm.
- For reverse installation, a wooden door must be at least 40mm wide, and a sash door, 36mm wide.
- Use a butt-hinge door if the door must open 180°.
- Installation dimensions vary somewhat with the type of hinge.
- The distance between the top of the door and the ceiling should be at least 50mm for later adjustment.
- With pivot hinges, install a hold-open device or door stopper to prevent the door from opening beyond its maximum opening angle.

Adjustment of Hold-Open Angle

Install a hold-open device as shown in the table for hold-open angles. The hold-open angle will vary with the type of hinge.