

# Patch Fitting Range

## Door Specifications:

- Maximum Door Weight 80 kg
- Maximum Door Width 1100 mm

## Recommended Torque for Fixing Screws:

- M6 – 10 Nm
- M6 – 15 Nm
- M8 – 20 Nm



## Available Finishes:

- Satin Stainless Steel SSS
- Polished Stainless Steel PSS
- Natural Aluminium NA

\*Other finishes available on application.

Design and Specification are subject to change without prior notice.



## Typical Glass Assemblies

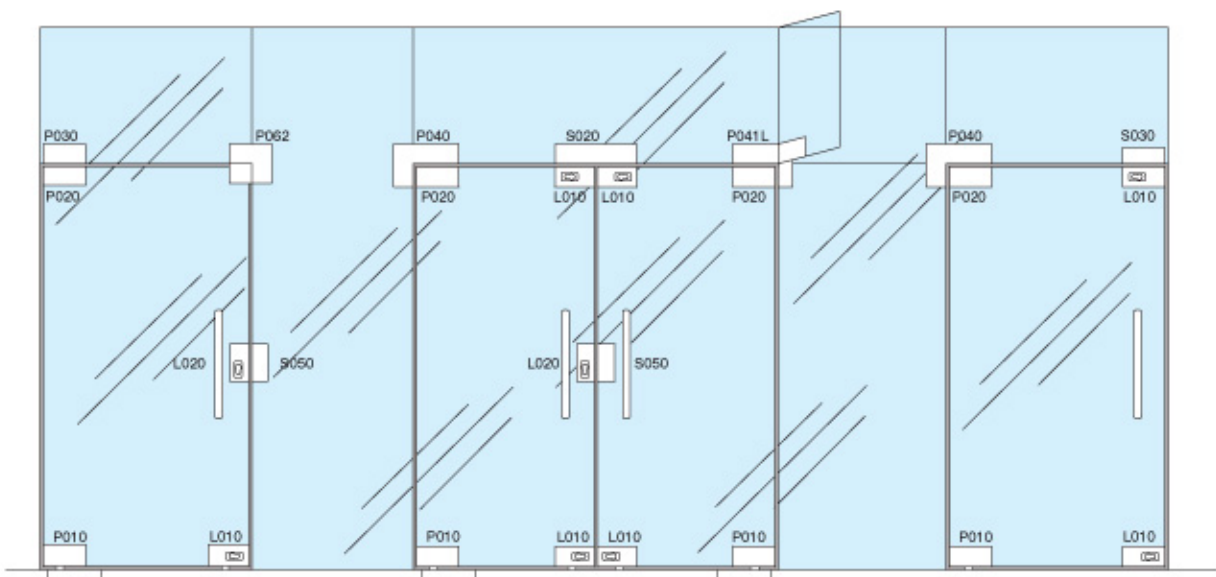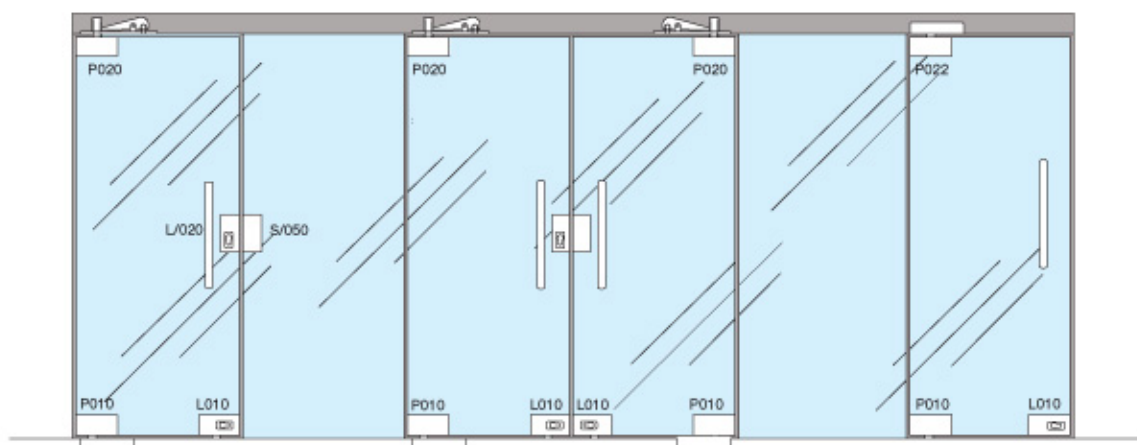

## L010

Corner Lock suits Europrofile Cylinder. Bolt has 20 mm projection. No. 8 keyway.

L010SSS  
L010PSS  
L010NA

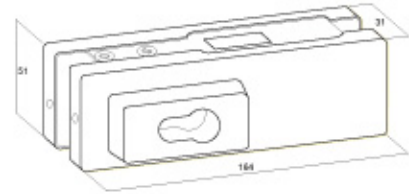
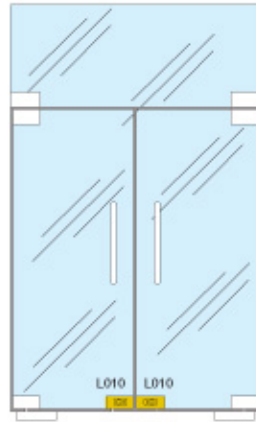


---

## L020

Centre lock suits Europrofile cylinder. Bolt has 20 mm projection. No. 8 keyway. (S050 strike box does not included)

L020SSS  
L020PSS  
L020NA

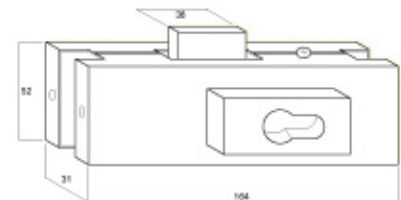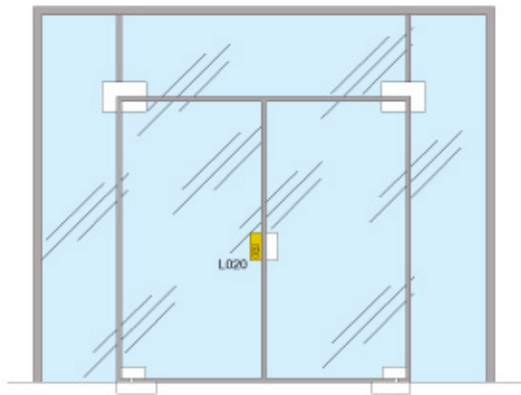


---

## S020

Double over panel strike box. Suits L010 Corner locks.



S020SSS  
S020PSS  
S020NA

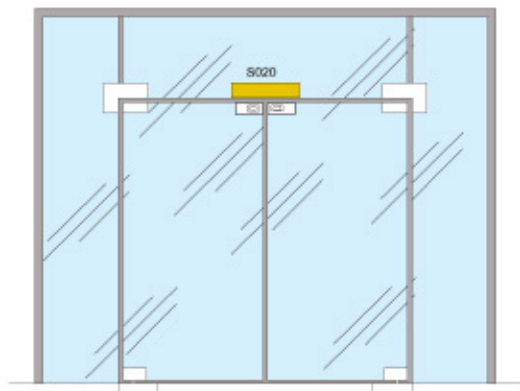

## P030

Top Patch with 15 mm pivot.

P030SSS  
P030PSS  
P030NA

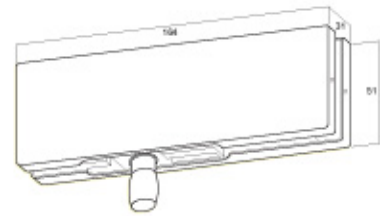
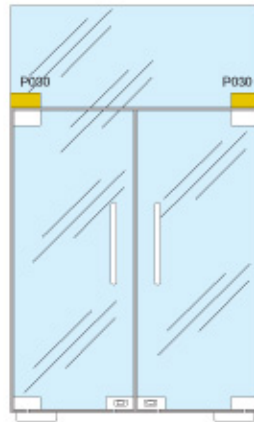


---

## P040

Top Patch for over and side panel with 15 mm pivot.

P040SSS  
P040PSS  
P040NA

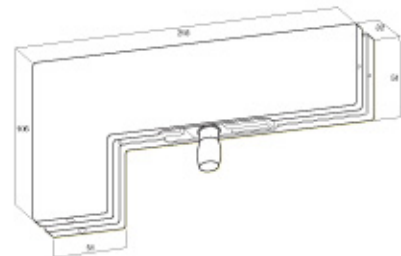
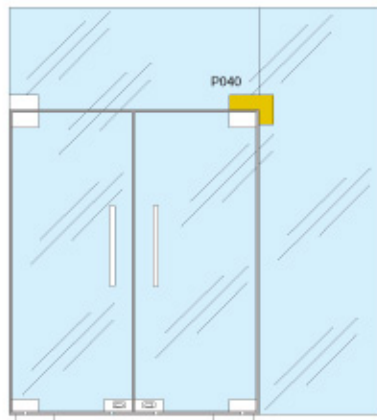


---

## P041L/R

Patch for over panels, side panel with fin fitting (Handed Left or Right).



P041LSSS  
P041LPSS  
P041LNA  
P041RSSS  
P041RPSS  
P041RNA

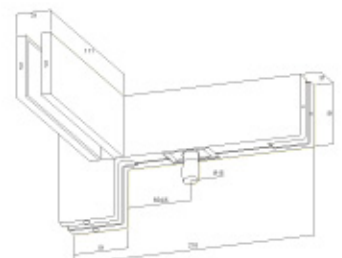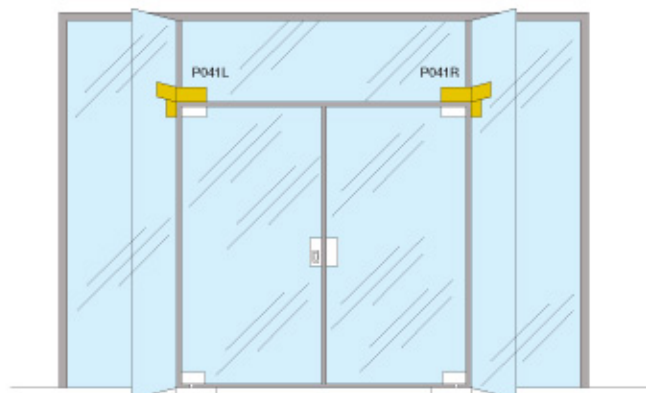

## P010

Bottom Door Patch to suit  
Floor Closer.

P010SSS  
P010PSS  
P010NA

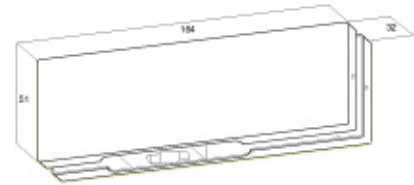
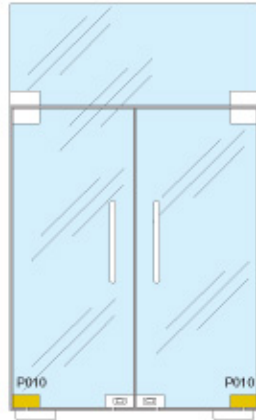


---

## P020

Top Door Patch to suit  
15 mm pivot.

P020SSS  
P020PSS  
P020NA

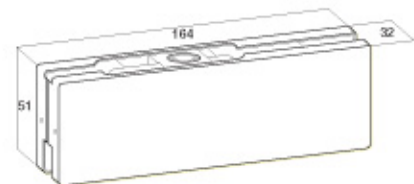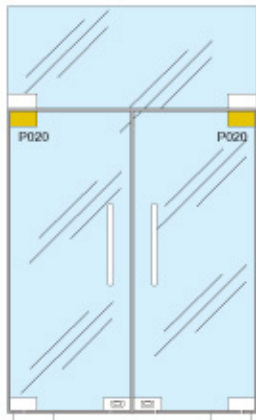

---

## P022

Top Patch to suit  
Transom Closer (side load).

P022SSS  
P022PSS  
P022NA

