

ABLOY® CABINET LOCKS

Complete control for your environment



CABINET LOCKS

Model					Key removable		Number of discs	Type of bolt	Cylinder type *)		
Product numbers	Dimensions (mm)	Cylinder protrusion A	Door thickness	In locked position only	In locked and unlocked pos.	C			E	N	
OF200 (3461)		25.5	0.5-25		●	11	flat	●	●	●	
OF201 (3462)		25.5	0.5-25	●		11	flat	●	●	●	
OF215 (3411)		N19.5 C17.5	0.5-19.5		●	7	flat	●		●	
OF216 (3412)		N19.5 C17.5	0.5-19.5	●		7	flat	●		●	
OF202 (3467)		21	0.5-21	●		11	spring latch	●	●	●	
OF217 (3417)		N15 C13	0.5-15	●		7	spring latch	●		●	
OF205		25.5	0.5-25	●		11	double hook	●	●	●	
OF206 (3451)		35	12-35		●	11	flat	●	●	●	
OF207 (3452)		35	12-35	●		11	flat	●		●	
OF212 (3401)		N29 C27	12-29		●	7	flat	●		●	
OF213 (3402)		N29 C27	12-29	●		7	flat	●		●	
OF208 (3457)		35	12-35		●	11	hook	●		●	
OF214 (3407)		N29 C27	12-29		●	7	hook	●		●	






ACCESSORIES

CABINET LOCKS ACCESSORIES

STRIKER PLATES



- Material: nickel-plated steel.
- Dimensions




ESCUTCHEON RING 401746



- Material: chrome-plated brass.
- Available also in other finishes. The codes for ordering according to the finish:
- 401746 chrome
- 401747 satin chrome
- 455142 brass

- Dimensions:




Please Note!
When using an escutcheon ring the diameter of the fitting hole must be 23-24 mm, and the maximum door thickness can be up to 4 mm thicker than the one mentioned in the table.

KEEP 401930



- Material: nickel-plated brass
- Dimensions:






ABLOY® CAM LOCKS

Expertise at your service



The unique **ABLOY®** cylinder construction offers reliable operation and ease of use in the most demanding applications.

THE RIGHT PRODUCT FOR EVERY APPLICATION

Model		Cam turns: key removable		Material of cylinder housing	Number of discs	Left hand operation possible	Cylinder type ^{*)}			
Dimensions	Product numbers	90° /180° In locked position only	360° In locked and unlocked pos.				C, P	E	D	N
UNIVERSAL RANGE 	CL100 (3275C) CL101 (3276C)	●	●	brass brass	11 11	●	● ●		● ●	
	CL103 (3277C, 3507D) CL106 (3278C)	●	●	brass brass	11 11	●	● ●	●	● ●	
	CL104 (3273C, 3504D) CL105 (3243C, 3505D) CL107 (3274C)	● ●	●	brass steel brass	9 9 9	● ●	● ● ●	●	● ● ●	
	CL108 CL109	● ●		brass brass	7 7	● ●	● ●		●	
	CL110	●		steel	9	●	●		●	
US RANGE 	CL200 (3373C, 3506D) CL201 (3503D)	● ●		brass steel	9 9	● ●	● ●	●	● ●	
	CL202 (3377C)	●		brass	11	●	●		●	
	CL203 (3375C)	●		brass	11	●	●		●	
	CL204 CL205 (3343C)	● ●		steel steel	9 9	● ●	● ●		●	
UL LISTED 										

■ = UL listed products


■ = Patented cylinder systems

*) C = ABLOY® CLASSIC
P = ABLOY® PROFILE

D = ABLOY® DISKLOCK PRO
E = ABLOY® EXEC
N = ABLOY® PROTEC

ABLOY® CAM LOCKS IN DETAIL

CAM TURNS

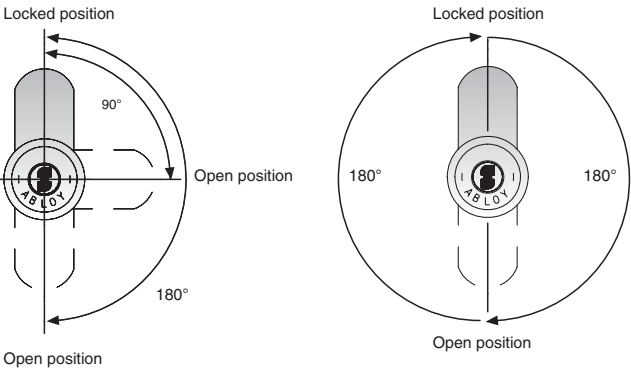

LOCK TYPES


CL100 CL200
CL103 CL201
CL104 CL202
CL105 CL203
CL108 CL204
CL109 CL205
CL110

LOCK TYPES


CL101
CL106
CL107

UNIVERSAL AND US SPECIFICATIONS

Universal specification

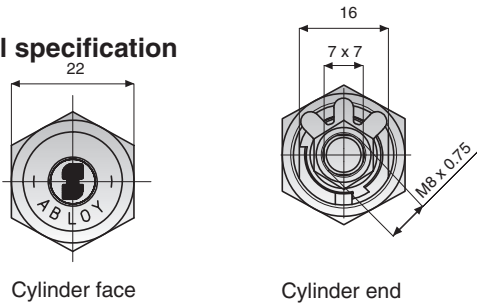

US specification

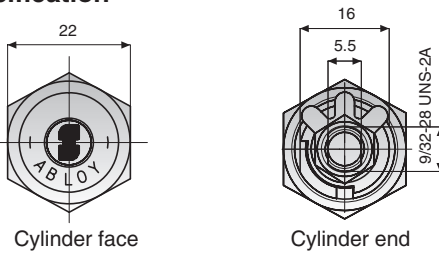

CONSTRUCTION AND FINISH

Brass cylinder (two vertical marks on cylinder face)




- Detainer discs, cylinder drum and end nut: Brass
- Cam, governor, nut lock washer and hex nut: Zinc-plated steel
- Cylinder housing: Chrome-plated brass

Steel cylinder (two horizontal marks on cylinder face)



- Detainer discs, cylinder drum and end nut: Brass
- Cam, governor, nut lock washer and hex nut: Zinc-plated steel
- Cylinder housing: Case-hardened, chrome-plated steel
- First disc: Nickel-plated, case-hardened steel

DIMENSIONS OF FITTING HOLE

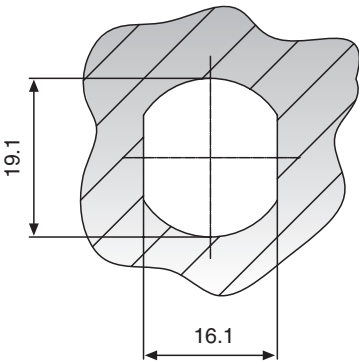




WHEN ORDERING, PLEASE SPECIFY

- Lock type
- Cylinder type
 - C = **ABLOY®** CLASSIC
 - P = **ABLOY®** PROFILE
 - D = **ABLOY®** DISKLOCK PRO
 - E = **ABLOY®** EXEC
 - N = **ABLOY®** PROTEC
- Number of keys in **ABLOY®** EXEC and **ABLOY®** DISKLOCK PRO (to be ordered separately). In other cylinder types 2 keys/lock included.
- Key profile
- Finish of the cylinder housing, if not standard (chrome)
 - M = brass
 - H = satin chrome
- Cam type, if required (see page 11)
- Cam turn (90°, 180°)
- Fitting plate, if required

ABLOY® CAM LOCK ACCESSORIES


CAMS

For cam locks in the universal range, three different cam models available: straight, hooked and offset. Cams are made of nickel-plated steel. Cams for the US range of cam locks are available in the US sales office.

Straight cam	Part No.	A	B	Offset cam	Part No.	A	B	C
	455608	26	18		455678	32	24	13.3
	434815	30.5	22.5		434959	33	25	26.5
	434869	33	25		455333	35	27	5
	455322	35	27		434928	35	27	6.5
	434609	38	30		455499	35	27	9.5
	434794	40	32		455525	35	27	10.5
	455556	45	37		434816	36	28	12
	455548	48	40		434799	36	28	22
	455494	53	45		455557	37	29	18.5
	455797	58	50		434766	38	30	15
	455606	68	60		434667	38	30	7
Hooked cam	Part No.	A	B	C	435097	40	32	5
	455514	31	23	16.5	434702	40	32	19
	434605	32	24	17.5	434635	45	37	5
	455332	35	27	20.5	434700	45	37	8
	455492	42.5	34.5	28	434852	45	37	13.3
	434818	47.5	39.5	33	434757	48	40	19
	455780	58	50	43.5	434788	50	42	12.5
	455549	60.5	52.5	46	455461	61	53	18


FITTING PLATES

Fitting plates are made of steel and should be ordered separately.




413807

- For use with plastic ring 4841003 in glass doors.
- Available also with brass finish, product number 413808
- Chrome-plated



455328


- Used inside of a wooden door to prevent the lock from rotating
- Fixed by screws through the upper holes of the plate
- Zinc-plated




434613

- Used mostly as replacement for cam locks of universal specifications
- Normally used on both sides of the mounting hole
- Zinc-plated


SPECIAL ACCESSORIES

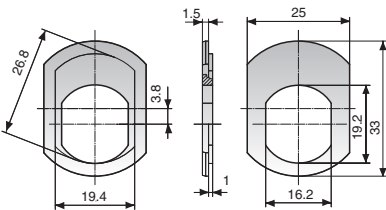

Fitting plate 441345

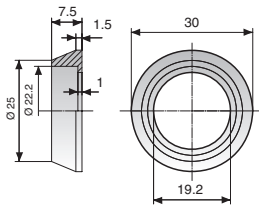

Protective collar 804757



Lifting sleeve 804252