


ELECTRIC RIM LOCKS



Specification

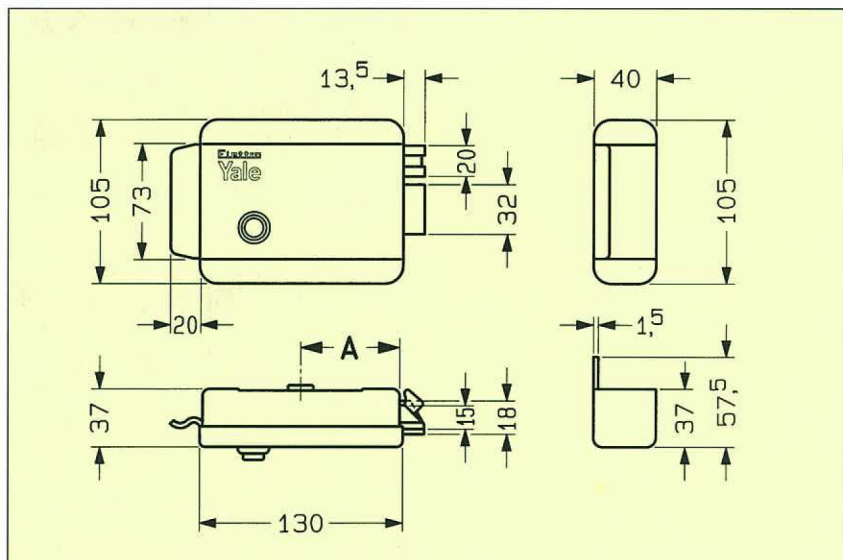

Technical information

Description	674/675 Series
Case Material & Finishes	Painted steel
Upper Latchbolt	Brass
Lower Latchbolt	Brass
Cylinder	Brass: Outside loose Cat. No. 220.31
Keys	3, in nickel plated brass
Key Differs	see Cylinders for Rim Locks section
Masterkeyable	see Cylinders for Rim Locks section
Door Thickness	from 35 to 90 mm
Striking Box	Painted steel

674/675 SERIES

Introduction

- Electric lock for wooden doors, with external cylinders and with inside push-button.

Operation

External	Internal
Upper Latchbolt	
No operation	No operation
Lower Latchbolt	
Key operation	Push-button operation and remote electric impulse

Electric Connection

Use only a 15 W/12V transformer (Cat. No. 670.11).

Standard

CE All electric locks conform with 89/336/EEC Directive.

Range

Backset (A)	674 Series	675 Series
60	674.60	675.60

Door
(From inside)

