


Technical features:

- CYLINDER:
- 5 pins key biting system (3 pins for short size)
- brass body
- brass plugs
- self-lubricating sintered steel cam
- pins in wear resistant bronze
- drivers in brass, cylindrical and mushroom-like for an antipicking function
- phosphor bronze springs
- KEY:
- nickel-plated brass

Supplied as standard:

- Fixing screw
- 3 keys:
 - item 1.01410.00.1 (5 pins)
 - or item 1.01425.00.1 (3 pins)


On request:

- KA, MK and relevant models


Finishes:

- STANDARD: sanded brass (fin. 00)
- ON REQUEST: nickel-plated brass (fin. 12)


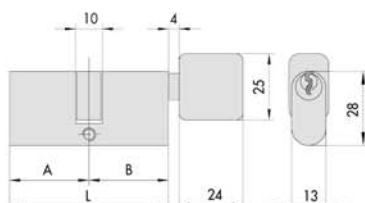
Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM				
		L	A	B	Pins				Type	Dim.	Hand	Fin.	Pers. Spec.

• Double cylinder


20 / 20	41,4	20,7	20,7	3	1 01425 00 1	0,120	12	1	08210	01	0		
28 / 28	55,4	27,7	27,7	5	1 01410 00 1	0,168	12	1	08210	02	0		
30 / 30	60,0	30,0	30,0	5	1 01410 00 1	0,180	12	1	08210	05	0		
28 / 35	62,7	27,7	35,0	5	1 01410 00 1	0,187	12	1	08210	06	0		
30 / 40	70,0	30,0	40,0	5	1 01410 00 1	0,204	12	1	08210	12	0		
35 / 35	70,0	35,0	35,0	5	1 01410 00 1	0,205	12	1	08210	13	0		
28 / 45	72,7	27,7	45,0	5	1 01410 00 1	0,210	6	1	08210	14	0		
28 / 53	80,7	27,7	53,0	5	1 01410 00 1	0,218	6	1	08210	16	0		
40 / 40	80,0	40,0	40,0	5	1 01410 00 1	0,231	6	1	08210	18	0		

• Single cylinder


28 / 10	38,0	27,7	10,3	5	1 01410 00 1	0,124	12	1	08220	02	0		
---------	------	------	------	---	--------------	-------	----	---	-------	----	---	--	--


• Thumb turn double cylinder


28 / 28	55,4	27,7	27,7	5	1 01410 00 1	0,183	6	1	08230	02	0		
35 / 28	62,7	35,0	27,7	5	1 01410 00 1	0,190	6	1	08230	06	0		